



A81.07.V6.69


HOB SET WITH PROGRESSIVE MIXER

6 STAR/3.5Lpm WELS RATING


STANDARD WITH INDENT HANDLE
OTHER LEVER HANDLE OPTIONS




.V2 PIN HANDLE




.V3 WHITE CARRARA MARBLE




.V5 KNURLED



.V6 REEDED




.V7 FLUTED



.V8 ROUND DIAL

.V4 BLACK MARQUINA MARBLE

- Tapware to be installed by a licenced plumber in accordance with AS/NZS 3500:2003
- Recommended working water pressure 150 - 500kPa
- Maximum water temperature is 65 deg C
- After completing the installation check function of tapware and ensure no water leaks.

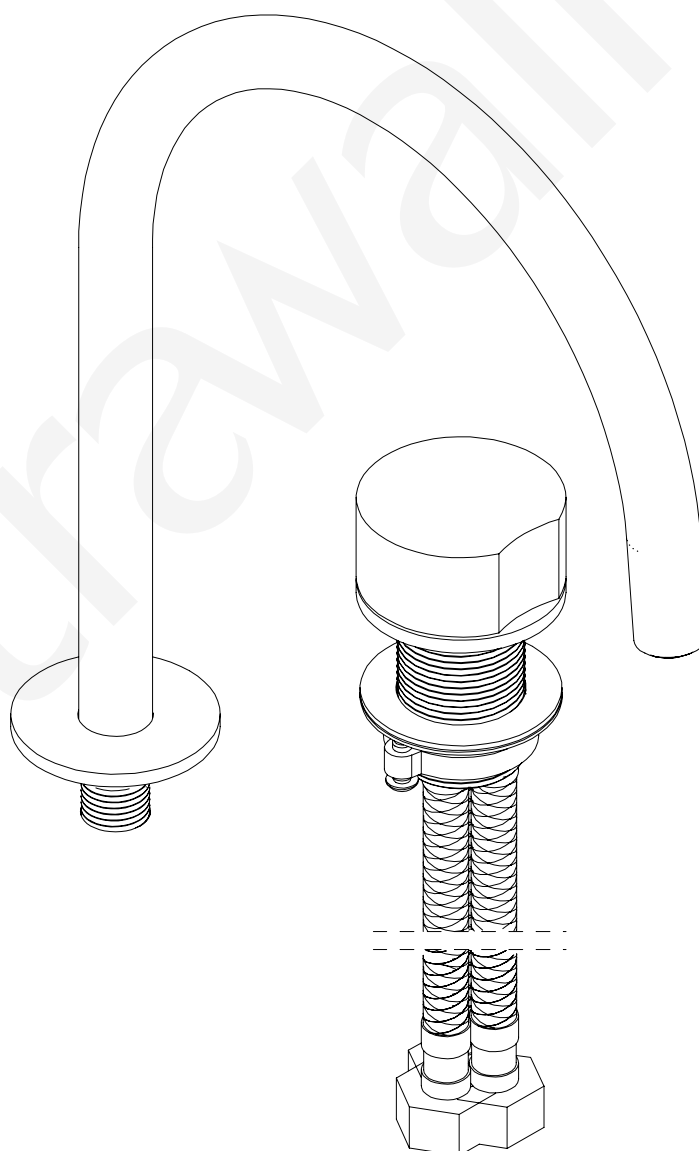

A81.07.V6.69

HOB SET WITH PROGRESSIVE MIXER

6 STAR/3.5Lpm WELS RATING

Ensure water lines are completely flushed prior to connecting the new mixer.

Remove fixing nut and washers on assembled hob mixer and spout.

Ensure that the flexible hoses are firmly connected into the base of the assembled mixer.

Place both items into position, and lower onto the mounting surface.

From the underneath secure washers and fixing nuts to both the hob mixer and spout.

Connect the flexible hose outlet to the spout.

Connect the hot and cold water supplies to isolating stop cocks.

