


BASIN SET

5 STAR/6Lpm WELS RATING

- Tapware to be installed by a licenced plumber in accordance with AS/NZS 3500:2003
- Recommended working water pressure 150 - 500kPa
- Maximum water temperature is 65°C
- After completing the installation check function of tapware and ensure no water leaks.

INSTALLATION TO SUIT:

- | | |
|----------------|----------------|
| • A67.00 | • A68.00.KN |
| • A67.00.V2 | • A68.00.V2.KN |
| • A67.00.LH | • A69.00 |
| • A67.00.V2.LH | • A69.00.V2 |

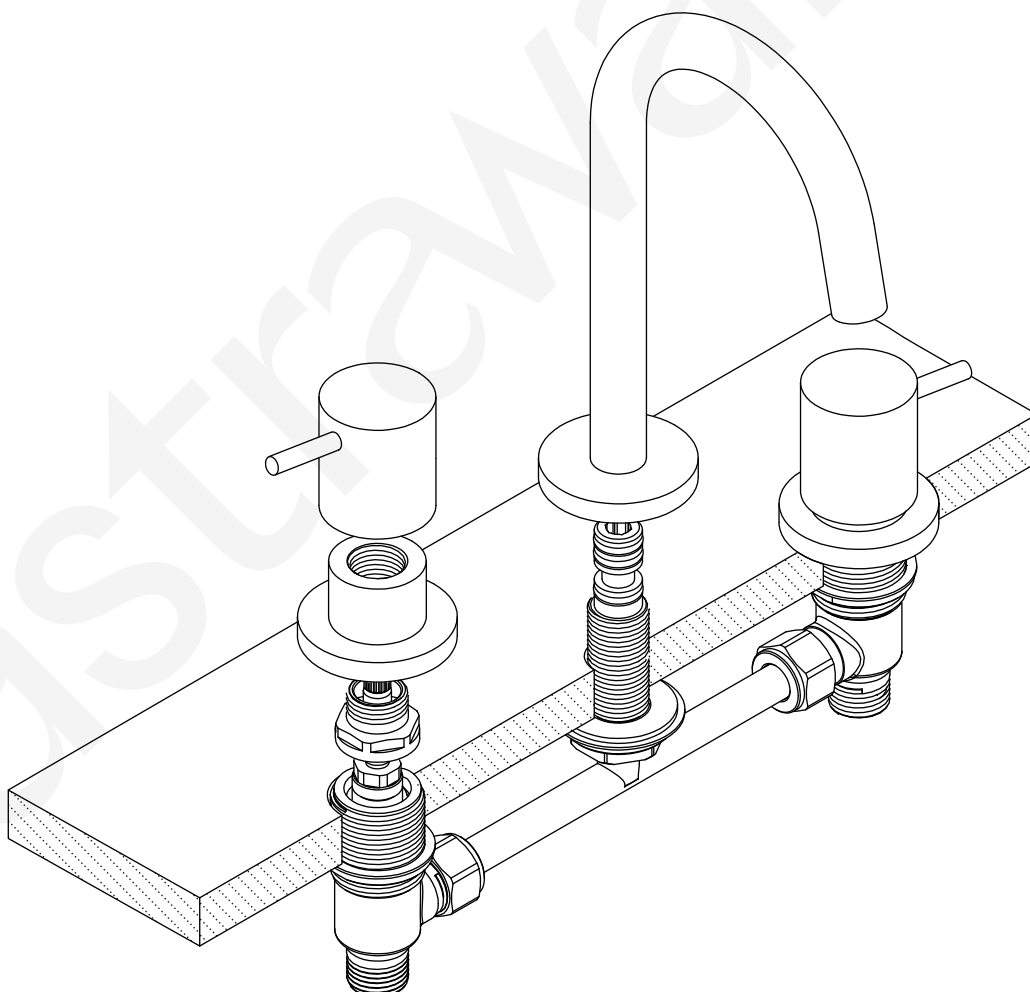

BASIN SET

5 STAR/6Lpm WELS RATING

Ensure water lines are completely flushed prior to connecting the new handles.

- 1) Measure basin tap hole centers and cut 'T' piece to length.
- 2) Install center outlet with fiber washer on underside and topside of basin
- 3) Remove handles and flanges from taps and fit spindle assembly to body
- 4) For ceramic disc cartridge install: Remove cartridge cover and install cartridge body with 15mm ring or tube spanner until cartridge comes to a firm stop.
[Do not over tighten or use multi-grips. Do not tighten cartridge using spindle.]
- 5) Fit washer over cartridge body and screw down cartridge cover against face of tap body using 25mm or 1" ring or tube spanner. [Do not use multi-grips.]
- 6) Connect 'T' piece to bodies - tighten nuts - push assembly into position connecting 'T' piece to center outlet
Seal around tap bodies with putty or similar.
- 7) Fit top locknut and washer (where supplied) so that it is flush with top of tap body.
[NOTE: not all models use top locknut]
- 8) Screw down flanges
- 9) Fit handles using Hex Allen key supplied
- 10) Tighten all nuts

Ceramic Disc Cartridge - For use in tap bodies is made to Australian Standard AS1718

NOTE: that water inlet temperature not to exceed 75°C and water pressure not to exceed 500kpa.
Recommended working water pressure 150 - 500kPa.

