


HOB SET

INSTALLATION TO SUIT

A67.00.V6.LH	A68.00.V6.KN	A69.00.V6
A67.07.V6.LH	A68.07.V6.KN	A69.07.V6


- Tapware to be installed by a licenced plumber in accordance with AS/NZS 3500:2003
- Recommended working water pressure 150 - 500kPa
- Maximum water temperature is 75 deg C
- After completing the installation check function of tapware and ensure no water leaks.

Important - Flush water lines on new installations before fitment to avoid damage to shower
This basin set has been designed to operate where the water inlet temperature does not exceed 75°C and water pressure does not exceed 500kpa.
Please exercise care during installation to ensure the male connecting threads do not damage the flow controllers incorporated.

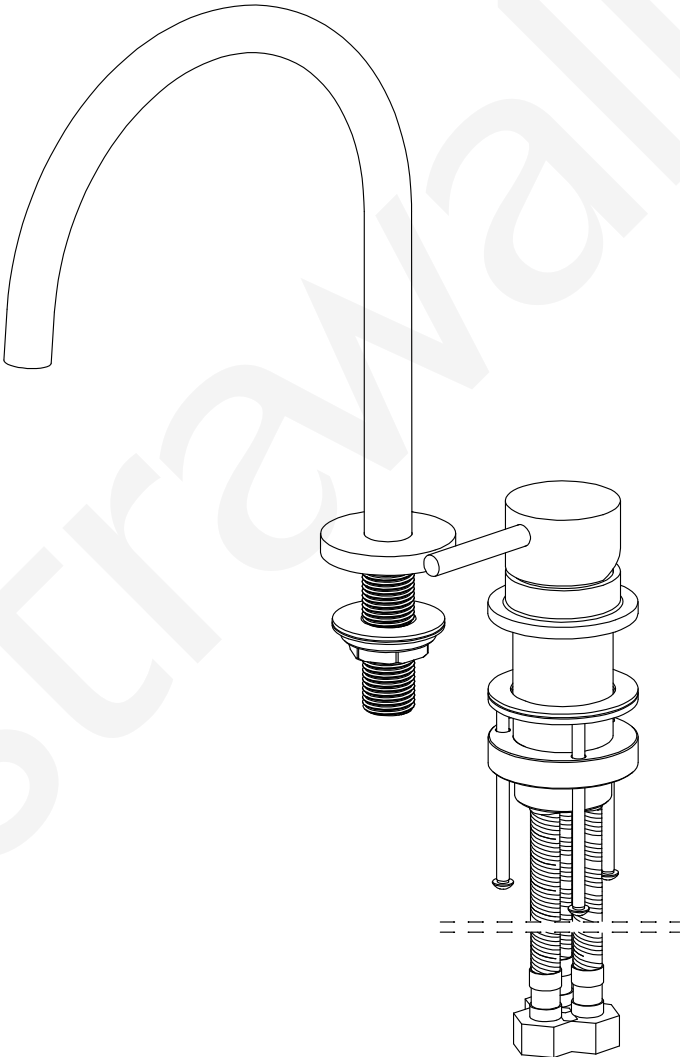

NOTE: • ACCESS PANEL REQUIRED
• ENSURE UNDERNEATH OF HOBSET IS WATERPROOF

HOB SET

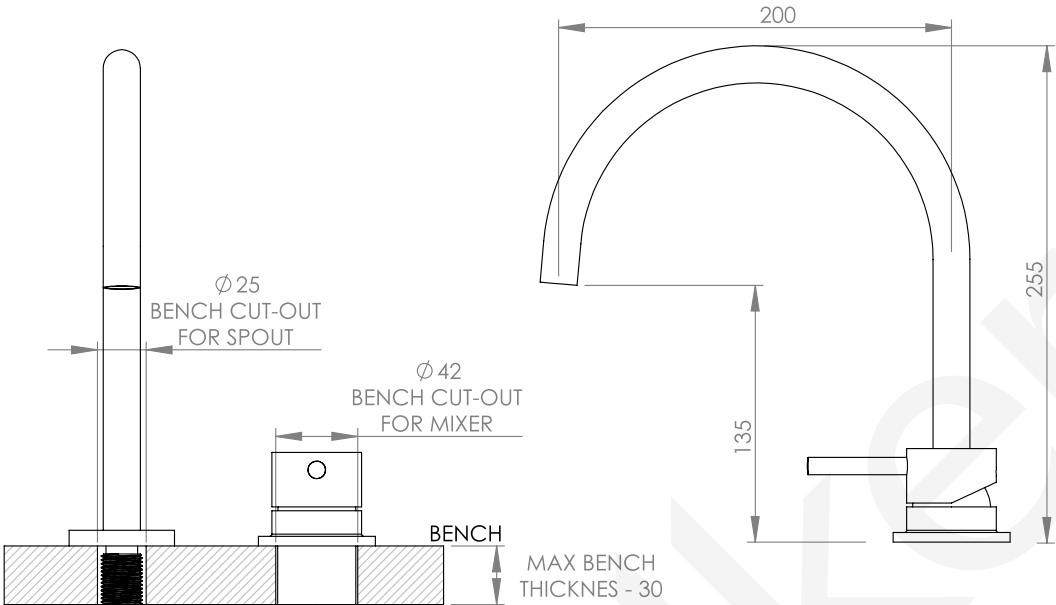

Ensure water lines are completely flushed prior to connecting the new mixer.

Remove fixing nut and washers on assembled hob mixer.
Ensure that the flexible hoses are firmly connected into the base of the assembled mixer.
Place into position, and lower onto the mounting surface.
From the underneath secure washers and fixing nuts to the hob mixer
Connect the flexible hose outlet to the accompanying spout.
Connect the hot and cold water supplies to isolating stop cocks.

