


KITCHEN SET WITH PULL OUT DUAL SPRAY
6 STAR/3.5Lpm WELS RATING

INSTALL TO SUIT

A67.08.V8.T	A67.08.V8.T.LH	A68.08.V8.T.KN	A69.08.V8.T	A81.08.V8.T
A67.08.V8.O	A67.08.V8.O.LH	A68.08.V8.O.KN	A69.08.V8.O	A81.08.V9.T
A67.08.V9.T	A67.08.V9.T.LH	A68.08.V9.T.KN	A69.08.V9.T	
A67.08.V9.O	A67.08.V9.O.LH	A68.08.V9.O.KN	A69.08.V9.O	

- Tapware to be installed by a licenced plumber in accordance with AS/NZS 3500:2003
- Recommended working water pressure 150 - 500kPa
- Maximum water temperature is 65 deg C
- After completing the installation check function of tapware and ensure no water leaks.

- 1) Ensure water lines are completely flushed prior to connections.
- 2) Remove fixing nut and washers on assembled hot and cold handles.
- 3) Remove fixing nut & washers including the lead weight on the pull-out spout.
- 4) Place both items into position, and lower onto the mounting surface.
- 5) From the underneath secure washers and fixing nuts from breech to hot and cold handles and spout.
- 6) Connect the flexible pull-out hose on the spout to the breech.
- 7) Connect the lead weight to the flexible pull-out hose so that the handpiece fully retracts into the tap body.
- 8) Connect the hot and cold water supplies to isolating stop cocks.

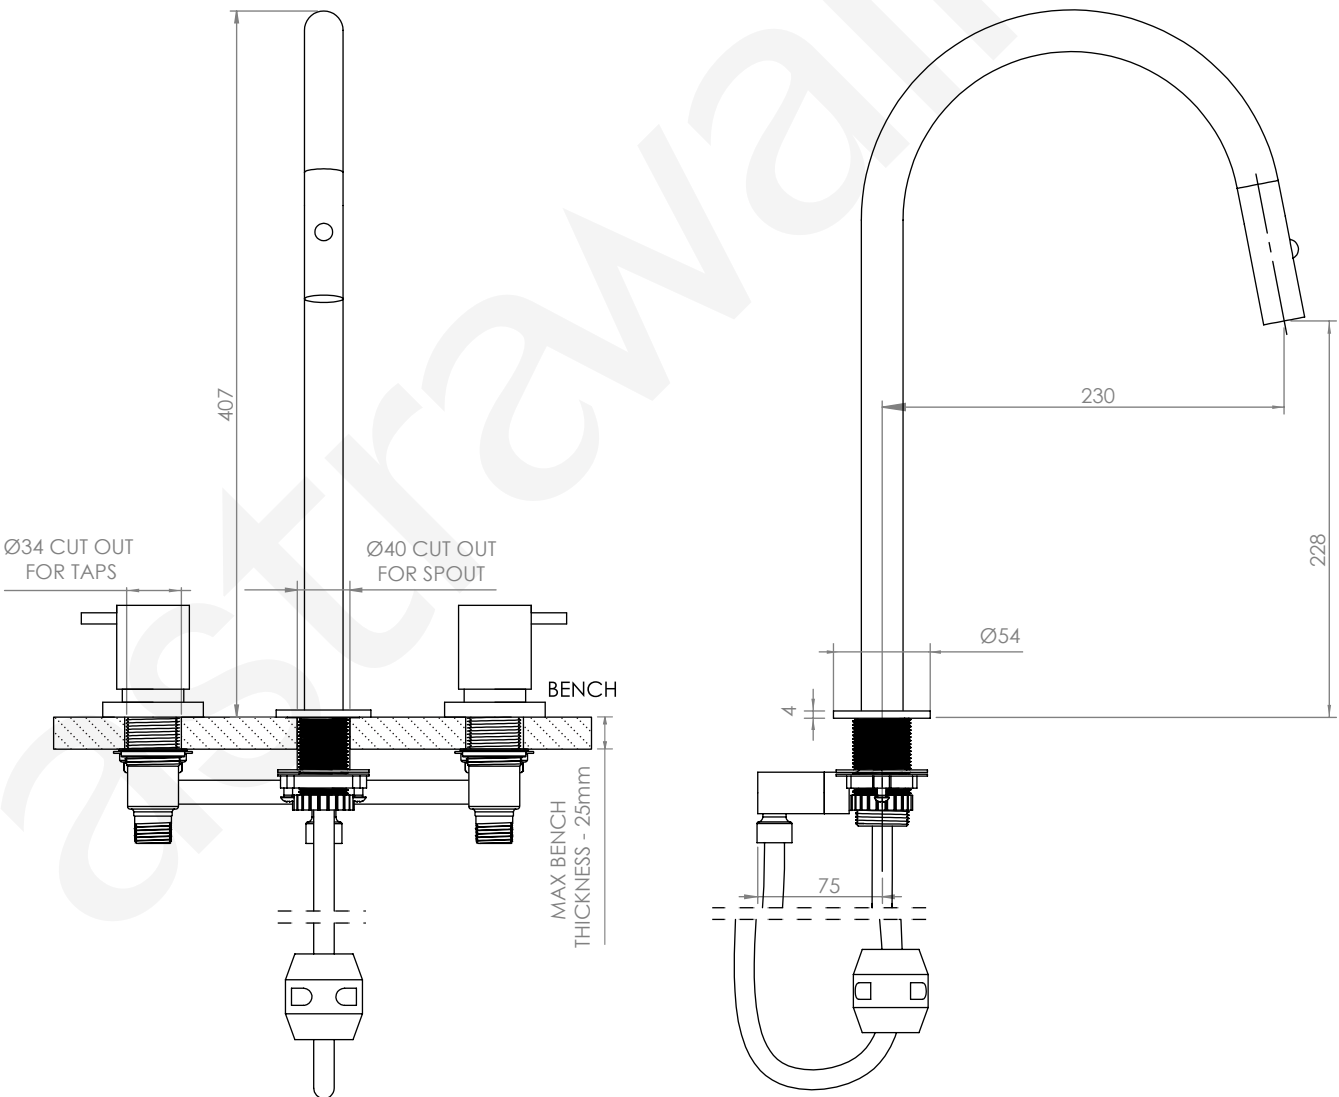

KITCHEN SET WITH PULL OUT DUAL SPRAY
6 STAR/3.5Lpm WELS RATING

