


WALL SET WITH MIXER

INSTALLATION TO SUIT:

A69.05.48	A67.05.48.LH	A68.05.48.KN
A69.06.48	A67.06.48.LH	A68.06.48.KN
A69.06.48.250	A67.06.48.250.LH	A68.06.48.250.KN

- Tapware to be installed by a licenced plumber in accordance with AS/NZS 3500:2021
- Recommended working water pressure 150 - 500kPa
- Maximum water temperature is 65 deg°C
- Ensure only parallel thread fittings are used (not tapered thread)
- After completing the installation check function of tapware and ensure no water leaks.

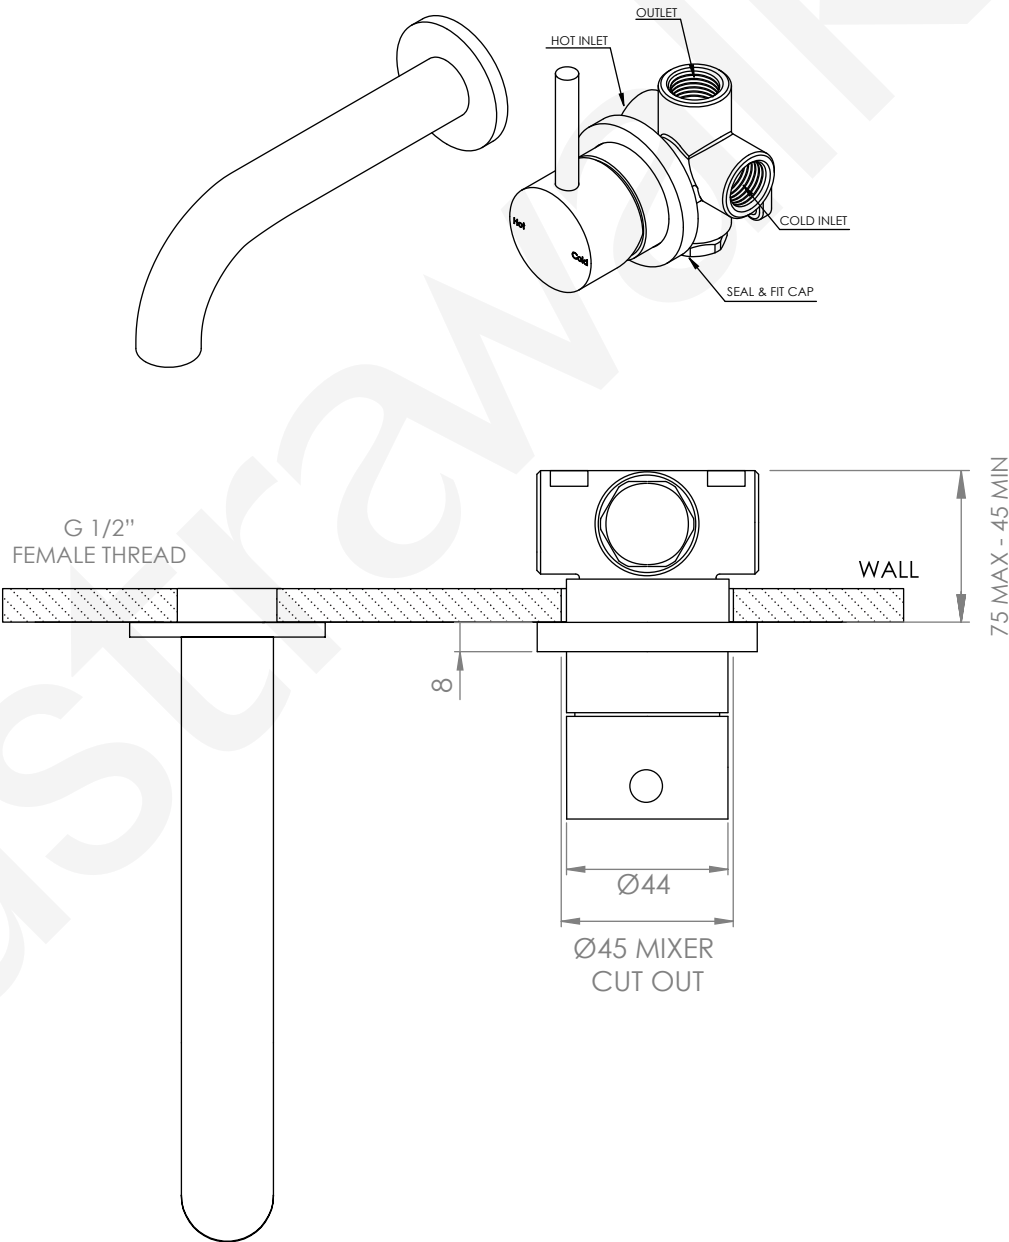

WALL SET WITH MIXER

Install the mixer body and male 1/2" thread (not supplied) to a secure nogging at the correct depth as shown in the drawing below.

To allow the tapware to fit correctly the thickness of the finished wall surface must be calculated prior to 'rough-in'.

Once tapware is ready to fit off, screw spout onto male G1/2" thread

Secure the flange to the mixer to the mixer body and ensure this is sealed and water-tight.

Attach handle to the spindle spline. Tighten well using an Allen Key.

