



A81.00.69


BASIN SET

6 STAR/3.5Lpm WELS RATING


STANDARD WITH INDENT HANDLE
OTHER LEVER HANDLE OPTIONS




.V2 PIN HANDLE




.V3 WHITE CARRARA MARBLE
.V4 BLACK MARQUINA MARBLE




.V5 KNURLED



.V6 REEDED




.V7 FLUTED



.V8 ROUND DIAL

- Tapware to be installed by a licenced plumber in accordance with AS/NZS 3500:2003
- Recommended working water pressure 150 - 500kPa
- Maximum water temperature is 65 deg C
- After completing the installation check function of tapware and ensure no water leaks.

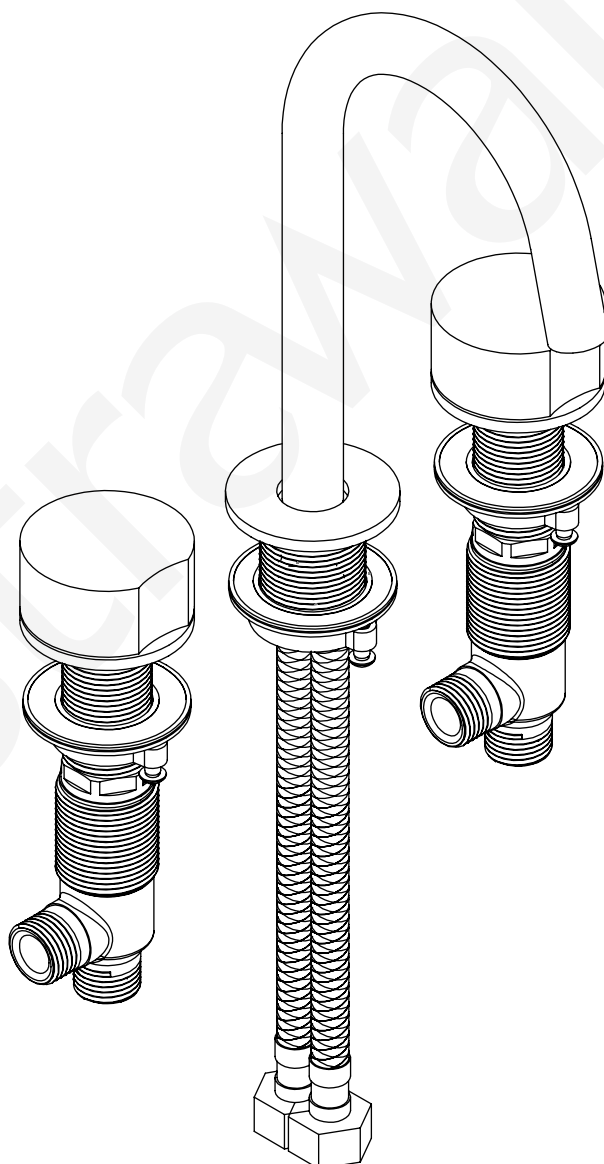

6 STAR/3.5Lpm WELS RATING

Connect the hot and cold water supplies to isolating stop cocks.

