

DIVERTER MIXER


INSTALLATION TO SUIT

A69.48.V4

A67.48.V4.LH

A68.48.V4.KN


- Tapware to be installed by a licenced plumber in accordance with AS/NZS 3500:2021
- Recommended working water pressure 150 - 500kPa
- This tap is suitable for high pressure applications where both hot & cold water supply pressures are at 150kpa or above
- Maximum water temperature is 65 deg C
- Flush out pipework prior to new installation
- After completing the installation check function of tapware and ensure no water leaks.
- WARRANTY: Please refer to the full warranty statement before installing at <https://astrawalker.com.au/certification-warranty/>

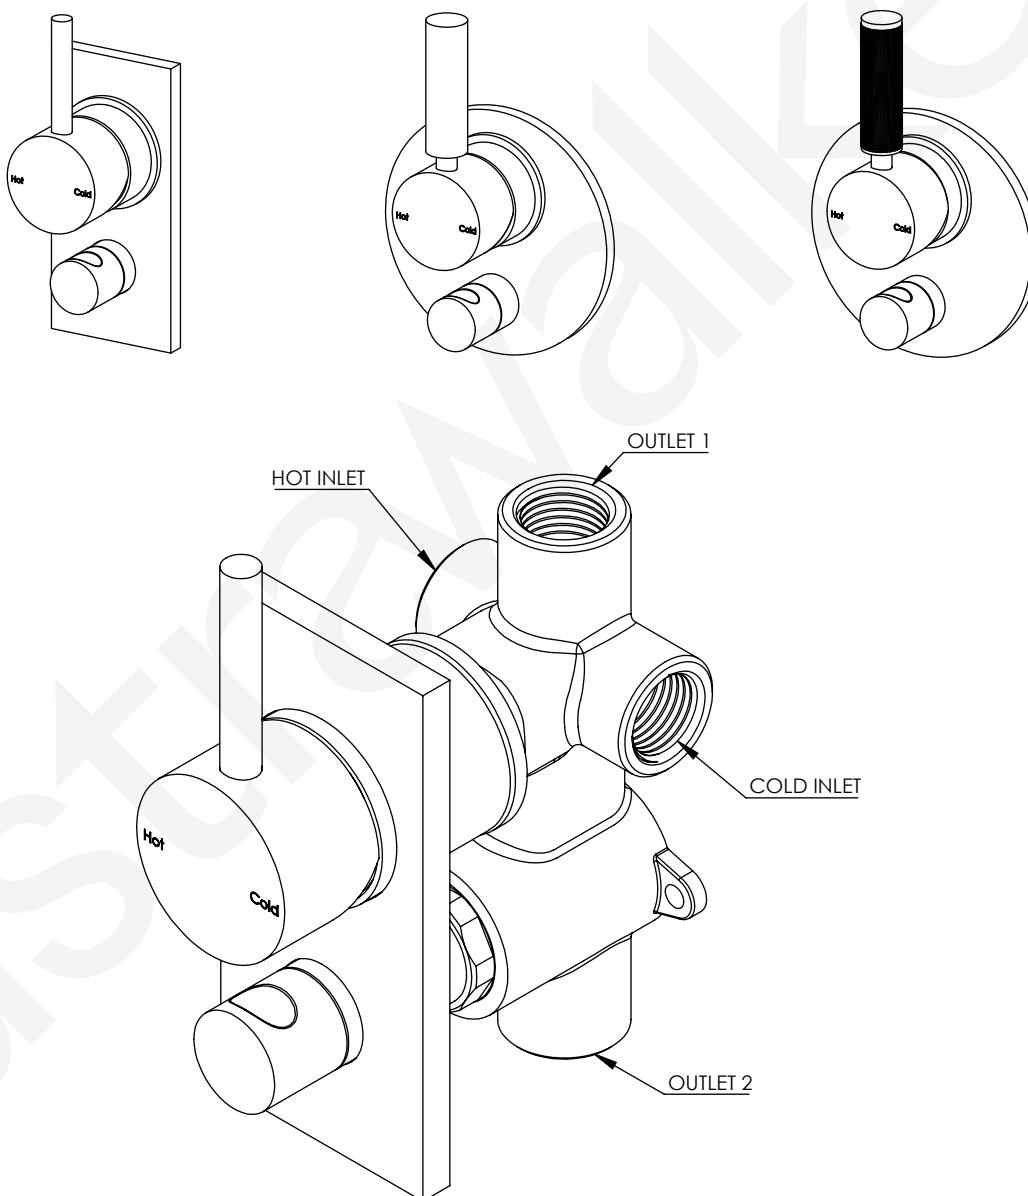

1 / 2

DIVERTER MIXER

Install the diverter mixer supplied to a secure nogging at the correct depth as shown in the drawing below. Ensure the mixer is square and parallel between the wall studs. To allow the tapware to fit correctly the thickness of the finished wall surface must be calculated prior to 'rough-in'.

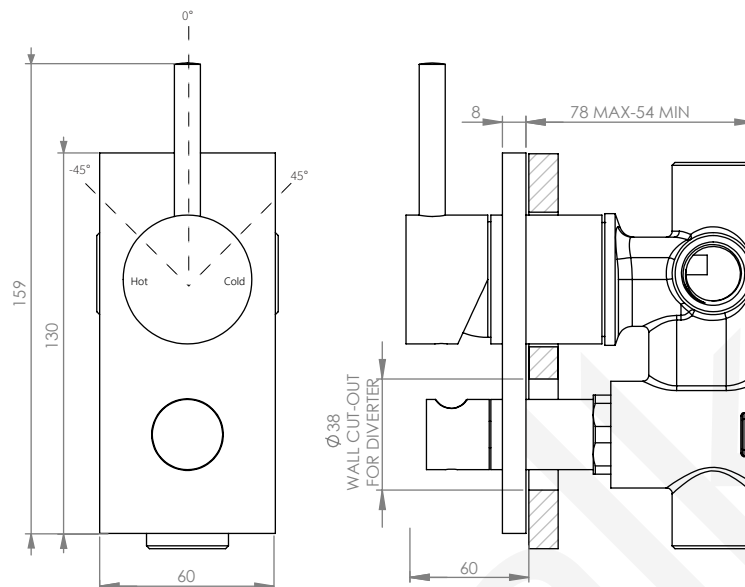

When installing diverter mixer ensure that it is positioned the correct way (as per markings on the body) with hot water on the left and cold water on the right when viewed from an operating position.

Ensure water lines are completely flushed prior to connecting the mixer.

Prior to fit off ensure the correct size cut-out around the diverter mixer has been achieved.

Secure the cover flange for the diverter mixer to the inwall body and ensure this is sealed and water-tight. Fit handle and secure grub screw using an Allen Key.

